

# DOCUMENT RETRIEVAL REQUEST FORM

**\*\*Please include RightFax Number to expedite return of documents\*\***

Requester's Name: <i>Pankaj Kumar</i>	Case Serial Number: <i>09/318445</i>	Art Unit/Org.: <i>2631</i>
Phone: <i>305 0194</i>	**RightFax:	Building: <i>CPK 2</i>
		Room Number: <i>3822</i>

Class/Sub-Class:

Date of Request: <i>4/6/2004</i>	Date Needed By: <i>ASAP</i>
----------------------------------	-----------------------------

Paste or add text of citation or bibliography: Paste Citation Only one request per form. Original copy only. ☐

Author/Editor:			
Journal/Book Title:	<i>(International Telecommunication Union) ITU-T series G</i>		
Article Title:			
Volume Number:	Report Number:	Pages:	
Issue Number:	Series Number:	Year of Publication: <i>earlier than May 26, 1998</i>	
Publisher:			
Remarks:	<i>Please see attached. I desire something similar but published earlier than May 26, 1998.</i>		

**Staff Use Only**

Monthly Accession Number: *The isn't one*


Library Action	PTO		LC		NAL		NIH		NLM		NIST		Other	
	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd
Local Attempts														
Date	<i>4/7/04</i>													
Initials	<i>KEJ</i>													
Results	<i>None</i>													
Examiner Called														
Page Count														
Money Spent														

		Source										Date			
Remarks/Comments 1st and 2nd denotes time taken to a library	Ordered From:														
O/N - Under NLM means Overnight		Comments:													

XP-002200769



INTERNATIONAL TELECOMMUNICATION UNION

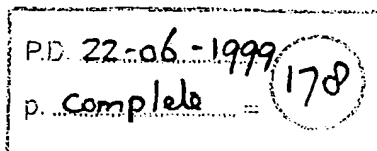

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**G.992.2**

(06/99)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,  
DIGITAL SYSTEMS AND NETWORKS

Digital transmission systems – Digital sections and digital  
line system – Access networks

---

**Splitterless asymmetric digital subscriber line  
(ADSL) transceivers**

ITU-T Recommendation G.992.2

(Previously CCITT Recommendation)

**International Telecommunication Union**[Our Sites](#) [News](#) [Events](#) [Publications](#) [Site Map](#) [About Us](#)[Français](#) [Español](#)[Print version](#)[Home](#) : [ITU-T](#) : [Publications](#) : [Recommendations](#) :  
Series G [Search](#)  
[Recently posted](#) - [Search Recommendations](#) - [Shopping cart](#)**Transmission systems and media, digital systems and networks**

- [G.100](#) Definitions used in Recommendations on general characteristics of international telephone connections and circuits
- [G.100.1](#) The use of the decibel and of relative levels in speechband telecommunications
- [G.101](#) The transmission plan
- [G.102](#) Transmission performance objectives and Recommendations
- [G.103](#) Hypothetical reference connections
- [G.105](#) Hypothetical reference connection for crosstalk studies
- [G.107](#) The E-Model, a computational model for use in transmission planning
- [G.108](#) Application of the E-model: A planning guide
- [G.108.1](#) Guidance for assessing conversational speech transmission quality effects not covered by the E-model
- [G.108.2](#) Transmission planning aspects of echo cancellers
- [G.109](#) Definition of categories of speech transmission quality
- [G.111](#) Loudness ratings (LRs) in an international connection
- [G.113](#) Transmission impairments due to speech processing
- [G.114](#) One-way transmission time
- [G.115](#) Mean active speech level for announcement and speech synthesis systems
- [G.116](#) Transmission performance objectives applicable to end-to-end international connections
- [G.117](#) Transmission aspects of unbalance about earth
- [G.120](#) Transmission characteristics of national networks
- [G.121](#) Loudness ratings (LRs) of national systems
- [G.122](#) Influence of national systems on stability and talker echo in international connections
- [G.123](#) *[Withdrawn] Circuit noise in national networks*
- [G.125](#) *[Withdrawn] Characteristics of national circuits on carrier systems*
- [G.126](#) Listener echo in telephone networks
- [G.131](#) Talker echo and its control
- [G.132](#) *[Withdrawn] Attenuation distortion*
- [G.133](#) *[Withdrawn] Group-delay distortion*
- [G.134](#) *[Withdrawn] Linear crosstalk*
- [G.135](#) *[Withdrawn] Error on the reconstituted frequency*
- [G.136](#) Application rules for automatic level control devices
- [G.141](#) *[Withdrawn] Attenuation distortion*
- [G.142](#) Transmission characteristics of exchanges
- [G.143](#) *[Withdrawn] Circuit noise and the use of compandors*
- [G.151](#) *[Withdrawn] General performance objectives applicable to all modern international circuits and national extension circuits*
- [G.152](#) *[Withdrawn] Characteristics appropriate to long-distance circuits of a length not exceeding 2500 km*
- [G.153](#) *[Withdrawn] Characteristics appropriate to international circuits more than 2500 km in length*

- G.161 Interaction aspects of signal processing network equipment
- G.162 *[Withdrawn] Characteristics of companders for telephony*
- G.163 *[Withdrawn] Call concentrating systems*
- G.164 Echo suppressors
- G.165 Echo cancellers
- G.166 *[Withdrawn] Characteristics of syllabic companders for telephony on high capacity long distance systems*
- G.167 Acoustic echo controllers
- G.168 Digital network echo cancellers
- G.169 Automatic level control devices
- G.171 *[Withdrawn] Transmission plan aspects of privately operated networks*
- G.172 Transmission plan aspects of international conference calls
- G.173 Transmission planning aspects of the speech service in digital public land mobile networks
- G.174 Transmission performance objectives for terrestrial digital wireless systems using portable terminals to access the PSTN
- G.175 Transmission planning for private/public network interconnection of voice traffic
- G.176 Planning guidelines for the integration of ATM technology into networks supporting voiceband services
- G.177 Transmission planning for voiceband services over hybrid Internet/PSTN connections
- G.180 Characteristics of N + M type direct transmission restoration systems for use on digital and analogue sections, links or equipment
- G.181 Characteristics of 1 + 1 type restoration systems for use on digital transmission links
- G.191 Software tools for speech and audio coding standardization
- G.192 A common digital parallel interface for speech standardisation activities
- G.211 Make-up of a carrier link
- G.212 Hypothetical reference circuits for analogue systems
- G.213 Interconnection of systems in a main repeater station
- G.214 Line stability of cable systems
- G.215 Hypothetical reference circuit of 5000 km for analogue systems
- G.221 Overall recommendations relating to carrier-transmission systems
- G.222 Noise objectives for design of carrier-transmission systems of 2500 km
- G.223 Assumptions for the calculation of noise on hypothetical reference circuits for telephony
- G.224 Maximum permissible value for the absolute power level (power referred to one milliwatt) of a signalling pulse
- G.225 Recommendations relating to the accuracy of carrier frequencies
- G.226 Noise on a real link
- G.227 Conventional telephone signal
- G.228 Measurement of circuit noise in cable systems using a uniform-spectrum random noise loading
- G.229 Unwanted modulation and phase jitter
- G.230 Measuring methods for noise produced by modulating equipment and through-connection filters
- G.231 Arrangement of carrier equipment
- G.232 12-channel terminal equipments
- G.233 Recommendations concerning translating equipments
- G.234 *[Withdrawn] 8-channel terminal equipments*
- G.235 *[Withdrawn] 16-channel terminal equipments*

- G.241 Pilots on groups, supergroups, etc.
- G.242 Through-connection of groups, supergroups, etc.
- G.243 Protection of pilots and additional measuring frequencies at points where there is a through-connection
- G.311 *[Withdrawn] General characteristics of systems providing 12 carrier telephone circuits on an open-wire pair*
- G.312 *[Withdrawn] Intermediate repeaters for open-wire carrier systems conforming to Recommendation G.311*
- G.313 *[Withdrawn] Open-wire lines for use with 12-channel carrier systems*
- G.314 *[Withdrawn] General characteristics of systems providing eight carrier telephone circuits on an open-wire pair*
- G.322 General characteristics recommended for systems on symmetric pair cables
- G.323 *[Withdrawn] A typical transistorized system on symmetric cable pairs*
- G.324 *[Withdrawn] General characteristics for valve-type systems on symmetric cable pairs*
- G.325 General characteristics recommended for systems providing 12 telephone carrier circuits on a symmetric cable pair [(12 + 12) systems]
- G.326 *[Withdrawn] Typical systems on symmetric cable pairs [(12 + 12) systems]*
- G.327 *[Withdrawn] Valve-type systems offering 12 carrier telephone circuits on a symmetric cable pair [(12 + 12) systems]*
- G.332 12 MHz systems on standardized 2.6/9.5 mm coaxial cable pairs
- G.333 60 MHz systems on standardized 2.6/9.5 mm coaxial cable pairs
- G.334 18 MHz systems on standardized 2.6/9.5 mm coaxial cable pairs
- G.337 *[Withdrawn] General characteristics of systems on 2.6/9.5 mm coaxial cable pairs*
- G.338 *[Withdrawn] 4 MHz valve-type systems on standardized 2.6/9.5 mm coaxial cable pairs*
- G.339 *[Withdrawn] 12 MHz valve-type systems on standardized 2.6/9.5 mm coaxial cable pairs*
- G.341 1.3 MHz systems on standardized 1.2/4.4 mm coaxial cable pairs
- G.343 4 MHz systems on standardized 1.2/4.4 mm coaxial cable pairs
- G.344 6 MHz systems on standardized 1.2/4.4 mm coaxial cable pairs
- G.345 12 MHz systems on standardized 1.2/4.4 mm coaxial cable pairs
- G.346 18 MHz systems on standardized 1.2/4.4 mm coaxial cable pairs
- G.352 Interconnection of coaxial carrier systems of different designs
- G.356 *[Withdrawn] (120 + 120) channel systems on a single coaxial pair*
- G.361 *[Withdrawn] Systems providing three carrier telephone circuits on a pair of open-wire lines*
- G.371 *[Withdrawn] FDM carrier systems for submarine cable*
- G.411 Use of radio-relay systems for international telephone circuits
- G.412 *[Withdrawn] Terminal equipments of radio-relay systems forming part of a general telecommunication network*
- G.421 Methods of interconnection
- G.422 Interconnection at audio-frequencies
- G.423 Interconnection at the baseband frequencies of frequency-division multiplex radio-relay systems
- G.431 Hypothetical reference circuits for frequency-division multiplex radio-relay systems
- G.433 *[Withdrawn] Hypothetical reference circuit for trans-horizon radio-relay systems for telephony using frequency-division multiplex*
- G.434 *[Withdrawn] Hypothetical reference circuit for systems using analogue transmission in the fixed-satellite service*
- G.441 Permissible circuit noise on frequency-division multiplex radio-relay systems

- G.442** Radio-relay system design objectives for noise at the far end of a hypothetical reference circuit with reference to telegraphy transmission
- G.444** *[Withdrawn] Allowable noise power in the hypothetical reference circuit of trans-horizon radio-relay systems for telephony using frequency-division multiplex*
- G.445** *[Withdrawn] Allowable noise power in the hypothetical reference circuit for frequency-division multiplex telephony in the fixed-satellite service*
- G.451** Use of radio links in international telephone circuits
- G.453** *[Withdrawn] Improved transmission system for HF radio-telephone circuits*
- G.464** *[Withdrawn] Principles of the devices used to achieve privacy in radiotelephone conversations*
- G.473** *[Withdrawn] Interconnection of a maritime mobile satellite system with the international automatic switched telephone service; transmission aspects*
- G.511** Test methodology for Group 3 facsimile processing equipment in the Public Switched Telephone Network
- G.541** *[Withdrawn] Specification of factory lengths of loaded telecommunication cable*
- G.542** *[Withdrawn] Specification of loading coils for loaded telecommunication cables*
- G.543** *[Withdrawn] Specification for repeater sections of loaded telecommunication cable*
- G.544** *[Withdrawn] Specifications for terminal equipment and intermediate repeater stations*
- G.601** Terminology for cables
- G.602** Reliability and availability of analogue cable transmission systems and associated equipments
- G.611** Characteristics of symmetric cable pairs for analogue transmission
- G.612** Characteristics of symmetric cable pairs designed for the transmission of systems with bit rates of the order of 6 to 34 Mbit/s
- G.613** Characteristics of symmetric cable pairs usable wholly for the transmission of digital systems with a bit rate of up to 2 Mbits
- G.614** Characteristics of symmetric pair star-quad cables designed earlier for analogue transmission systems and being used now for digital system transmission at bit rates of 6 to 34 Mbit/s
- G.621** Characteristics of 0.7/2.9 mm coaxial cable pairs
- G.622** Characteristics of 1.2/4.4 mm coaxial cable pairs
- G.623** Characteristics of 2.6/9.5 mm coaxial cable pairs
- G.631** Types of submarine cable to be used for systems with line frequencies of less than about 45 MHz
- G.641** *[Withdrawn] Waveguide diameters*
- G.650** Definition and test methods for the relevant parameters of single-mode fibres
- G.650.1** Definitions and test methods for linear, deterministic attributes of single-mode fibre and cable
- G.650.2** Definitions and test methods for statistical and non-linear related attributes of single-mode fibre and cable
- G.651** Characteristics of a 50/125 µm multimode graded index optical fibre cable
- G.652** Characteristics of a single-mode optical fibre and cable
- G.653** Characteristics of a dispersion-shifted single-mode optical fibre and cable
- G.654** Characteristics of cut-off shifted single-mode optical fibre and cable
- G.655** Characteristics of a non-zero dispersion-shifted single-mode optical fibre and cable
- G.661** Definition and test methods for the relevant generic parameters of optical amplifier devices and subsystems
- G.662** Generic characteristics of optical amplifier devices and subsystems

<u>G.663</u>	Application related aspects of optical amplifier devices and subsystems
<u>G.664</u>	Optical safety procedures and requirements for optical transport systems
<u>G.671</u>	Transmission characteristics of optical components and subsystems
<u>G.681</u>	<i>[Withdrawn] Functional characteristics of interoffice and long-haul line systems using optical amplifiers, including optical multiplexing</i>
<u>G.691</u>	Optical interfaces for single-channel STM-64, STM-256 and other SDH systems with optical amplifiers
<u>G.692</u>	Optical interfaces for multichannel systems with optical amplifiers
<u>G.693</u>	Optical interfaces for intra-office systems
<u>G.694.1</u>	Spectral grids for WDM applications: DWDM frequency grid
<u>G.694.2</u>	Spectral grids for WDM applications: CWDM wavelength grid
<u>G.695</u>	Optical interfaces for coarse wavelength division multiplexing applications
<u>G.700</u>	<i>[Withdrawn] Framework of the series G.700, G.800 and G.900 Recommendations</i>
<u>G.701</u>	Vocabulary of digital transmission and multiplexing, and pulse code modulation (PCM) terms
<u>G.702</u>	Digital hierarchy bit rates
<u>G.703</u>	Physical/electrical characteristics of hierarchical digital interfaces
<u>G.704</u>	Synchronous frame structures used at 1544, 6312, 2048, 8448 and 44 736 kbit/s hierarchical levels
<u>G.705</u>	Characteristics of plesiochronous digital hierarchy (PDH) equipment functional blocks
<u>G.706</u>	Frame alignment and cyclic redundancy check (CRC) procedures relating to basic frame structures defined in Recommendation G.704
<u>G.707</u>	Network node interface for the synchronous digital hierarchy (SDH)
<u>G.708</u>	Sub STM-0 network node interface for the synchronous digital hierarchy (SDH)
<u>G.709</u>	Interfaces for the Optical Transport Network (OTN)
<u>G.711</u>	Pulse code modulation (PCM) of voice frequencies
<u>G.712</u>	Transmission performance characteristics of pulse code modulation channels
<u>G.713</u>	<i>[Withdrawn] Performance characteristics of PCM channels between 2-wire interfaces at voice frequencies</i>
<u>G.714</u>	<i>[Withdrawn] Separate performance characteristics for the encoding and decoding sides of PCM channels applicable to 4-wire voice-frequency interfaces</i>
<u>G.715</u>	<i>[Withdrawn] Separate performance characteristics for the encoding and decoding side of PCM channels applicable to 2-wire interfaces</i>
<u>G.720</u>	Characterization of low-rate digital voice coder performance with non-voice signals
<u>G.721</u>	<i>[Withdrawn] 32 kbit/s adaptive differential pulse code modulation (ADPCM)</i>
<u>G.722</u>	7 kHz audio-coding within 64 kbit/s
<u>G.722.1</u>	Coding at 24 and 32 kbit/s for hands-free operation in systems with low frame loss
<u>G.722.2</u>	Wideband coding of speech at around 16 kbit/s using Adaptive Multi-Rate Wideband (AMR-WB)
<u>G.723</u>	<i>[Withdrawn] Extensions of Recommendation G.721 adaptive differential pulse code modulation to 24 and 40 kbit/s for digital circuit multiplication equipment application</i>
<u>G.723.1</u>	Dual rate speech coder for multimedia communications transmitting at 5.3 and 6.3 kbit/s
<u>G.724</u>	Characteristics of a 48-channel low bit rate encoding primary multiplex operating at 1544 kbit/s
<u>G.725</u>	System aspects for the use of the 7 kHz audio codec within 64 kbit/s
<u>G.726</u>	40, 32, 24, 16 kbit/s adaptive differential pulse code modulation (ADPCM)
<u>G.727</u>	5-, 4-, 3- and 2-bit/sample embedded adaptive differential pulse code modulation (ADPCM)
<u>G.728</u>	Coding of speech at 16 kbit/s using low-delay code excited linear prediction

<u>G.Imp728</u>	Implementors' Guide for ITU-T Recommendation G.728 ("Coding of speech at 16 kbit/s using low-delay code excited linear prediction")
<u>G.729</u>	Coding of speech at 8 kbit/s using conjugate-structure algebraic-code-excited linear-prediction (CS-ACELP)
<u>G.731</u>	Primary PCM multiplex equipment for voice frequencies
<u>G.732</u>	Characteristics of primary PCM multiplex equipment operating at 2048 kbit/s
<u>G.733</u>	Characteristics of primary PCM multiplex equipment operating at 1544 kbit/s
<u>G.734</u>	Characteristics of synchronous digital multiplex equipment operating at 1544 kbit/s
<u>G.735</u>	Characteristics of primary PCM multiplex equipment operating at 2048 kbit/s and offering synchronous digital access at 384 kbit/s and/or 64 kbit/s
<u>G.736</u>	Characteristics of a synchronous digital multiplex equipment operating at 2048 kbit/s
<u>G.737</u>	Characteristics of an external access equipment operating at 2048 kbit/s offering synchronous digital access at 384 kbit/s and/or 64 kbit/s
<u>G.738</u>	Characteristics of primary PCM multiplex equipment operating at 2048 kbit/s and offering synchronous digital access at 320 kbit/s and/or 64 kbit/s
<u>G.739</u>	Characteristics of an external access equipment operating at 2048 kbit/s offering synchronous digital access at 320 kbit/s and/or 64 kbit/s
<u>G.741</u>	General considerations on second order multiplex equipments
<u>G.742</u>	Second order digital multiplex equipment operating at 8448 kbit/s and using positive justification
<u>G.743</u>	Second order digital multiplex equipment operating at 6312 kbit/s and using positive justification
<u>G.744</u>	Second order PCM multiplex equipment operating at 8448 kbit/s
<u>G.745</u>	Second order digital multiplex equipment operating at 8448 kbit/s and using positive/zero/negative justification
<u>G.746</u>	Characteristics of second order PCM multiplex equipment operating at 6312 kbit/s
<u>G.747</u>	Second order digital multiplex equipment operating at 6312 kbit/s and multiplexing three tributaries at 2048 kbit/s
<u>G.751</u>	Digital multiplex equipments operating at the third order bit rate of 34 368 kbit/s and the fourth order bit rate of 139 264 kbit/s and using positive justification
<u>G.752</u>	Characteristics of digital multiplex equipments based on a second order bit rate of 6312 kbit/s and using positive justification
<u>G.753</u>	Third order digital multiplex equipment operating at 34 368 kbit/s and using positive/zero/negative justification
<u>G.754</u>	Fourth order digital multiplex equipment operating at 139 264 kbit/s and using positive/zero/negative justification
<u>G.755</u>	Digital multiplex equipment operating at 139 264 kbit/s and multiplexing three tributaries at 44 736 kbit/s
<u>G.761</u>	General characteristics of a 60-channel transcoder equipment
<u>G.762</u>	General characteristics of a 48-channel transcoder equipment
<u>G.763</u>	Digital circuit multiplication equipment using G.726 ADPCM and digital speech interpolation
<u>G.764</u>	Voice packetization - Packetized voice protocols
<u>G.765</u>	Packet circuit multiplication equipment
<u>G.766</u>	Facsimile demodulation/remodulation for digital circuit multiplication equipment
<u>G.767</u>	Digital circuit multiplication equipment using 16 kbit/s LD-CELP, digital speech interpolation and facsimile demodulation/remodulation
<u>G.768</u>	Digital circuit multiplication equipment using 8 kbit/s CS-ACELP
<u>G.769</u>	Circuit Multiplication Equipment optimized for IP-based networks
<u>G.771</u>	<i>[Withdrawn] Q-interfaces and associated protocols for transmission equipment in the TMN</i>



<u>G.772</u>	Protected monitoring points provided on digital transmission systems
<u>G.773</u>	Protocol suites for Q-interfaces for management of transmission systems
<u>G.Imp773</u>	Implementors' Guide for ITU-T Recommendation G.773
<u>G.774</u>	Synchronous digital hierarchy (SDH) - Management information model for the network element view
<u>G.774.1</u>	Synchronous digital hierarchy (SDH) - Bidirectional performance monitoring for the network element view
<u>G.774.01</u>	Synchronous Digital Hierarchy (SDH) performance monitoring for the network element view
<u>G.774.2</u>	Synchronous digital hierarchy (SDH) - Configuration of the payload structure for the network element view
<u>G.774.02</u>	Synchronous digital hierarchy (SDH) configuration of the payload structure for the network element view
<u>G.774.3</u>	Synchronous digital hierarchy (SDH) management of multiplex-section protection for the network element view
<u>G.774.03</u>	Synchronous digital hierarchy (SDH) management of multiplex-section protection for the network element view
<u>G.774.4</u>	Synchronous digital hierarchy (SDH) - Management of the subnetwork connection protection for the network element view
<u>G.774.04</u>	Synchronous digital hierarchy (SDH) management of the subnetwork connection protection for the network element view
<u>G.774.5</u>	Synchronous digital hierarchy (SDH) management of connection supervision functionality (HCS/LCS) for the network element view
<u>G.774.05</u>	Synchronous Digital Hierarchy (SDH) management of connection supervision functionality (HCS/LCS) for the network element view
<u>G.774.6</u>	Synchronous Digital Hierarchy (SDH) - Unidirectional performance monitoring for the network element view
<u>G.774.7</u>	Synchronous digital hierarchy (SDH) - Management of lower order path trace and interface labelling for the network element view
<u>G.774.8</u>	Synchronous digital hierarchy (SDH) - Management of radio-relay systems for the network element view
<u>G.774.9</u>	Synchronous digital hierarchy (SDH) - Configuration of linear multiplex-section protection for the network element view
<u>G.774.10</u>	Synchronous Digital Hierarchy (SDH) Multiplex Section (MS) shared protection ring management for the network element view
<u>G.775</u>	Loss of Signal (LOS), Alarm Indication Signal (AIS) and Remote Defect Indication (RDI) defect detection and clearance criteria for PDH signals
<u>G.776.1</u>	Managed objects for signal processing network elements
<u>G.776.3</u>	ADPCM DCME configuration map report
<u>G.780</u>	Vocabulary of terms for synchronous digital hierarchy (SDH) networks and equipment
<u>G.781</u>	Synchronization layer functions
<u>G.782</u>	<i>[Withdrawn] Types and general characteristics of synchronous digital hierarchy (SDH) equipment</i>
<u>G.783</u>	Characteristics of synchronous digital hierarchy (SDH) equipment functional blocks
<u>G.784</u>	Synchronous digital hierarchy (SDH) management
<u>G.785</u>	Characteristics of a flexible multiplexer in a synchronous digital hierarchy environment
<u>G.791</u>	General considerations on transmultiplexing equipments
<u>G.792</u>	Characteristics common to all transmultiplexing equipments
<u>G.793</u>	Characteristics of 60-channel transmultiplexing equipments
<u>G.794</u>	Characteristics of 24-channel transmultiplexing equipments

<u>G.795</u>	Characteristics of codecs for FDM assemblies
<u>G.796</u>	Characteristics of a 64 kbit/s cross-connect equipment with 2048 kbit/s access ports
<u>G.797</u>	Characteristics of a flexible multiplexer in a plesiochronous digital hierarchy environment
<u>G.798</u>	Characteristics of optical transport network hierarchy equipment functional blocks
<u>G.801</u>	Digital transmission models
<u>G.802</u>	Interworking between networks based on different digital hierarchies and speech encoding laws
<u>G.803</u>	Architecture of transport networks based on the synchronous digital hierarchy (SDH)
<u>G.804</u>	ATM cell mapping into Plesiochronous Digital Hierarchy (PDH)
<u>G.805</u>	Generic functional architecture of transport networks
<u>G.806</u>	Characteristics of Transport Equipment - Description Methodology and Generic Functionality
<u>G.807</u>	Requirements for automatic switched transport networks (ASTN)
<u>G.808.1</u>	Generic protection switching - Linear trail and sub-network protection
<u>G.809</u>	Functional architecture of connectionless layer networks
<u>G.810</u>	Definitions and terminology for synchronization networks
<u>G.811</u>	Timing characteristics of primary reference clocks
<u>G.812</u>	Timing requirements of slave clocks suitable for use as node clocks in synchronization networks
<u>G.813</u>	Timing characteristics of SDH equipment slave clocks (SEC)
<u>G.821</u>	Error performance of an international digital connection operating at a bit rate below the primary rate and forming part of an Integrated Services Digital Network
<u>G.822</u>	Controlled slip rate objectives on an international digital connection
<u>G.823</u>	The control of jitter and wander within digital networks which are based on the 2048 kbit/s hierarchy
<u>G.824</u>	The control of jitter and wander within digital networks which are based on the 1544 kbit/s hierarchy
<u>G.825</u>	The control of jitter and wander within digital networks which are based on the synchronous digital hierarchy (SDH)
<u>G.826</u>	End-to-end error performance parameters and objectives for international, constant bit-rate digital paths and connections
<u>G.827</u>	Availability performance parameters and objectives for end-to-end international constant bit-rate digital paths
<u>G.827.1</u>	Availability performance objectives for end-to-end international constant bit-rate digital paths at or above the primary rate
<u>G.828</u>	Error performance parameters and objectives for international, constant bit rate synchronous digital paths
<u>G.829</u>	Error performance events for SDH multiplex and regenerator sections
<u>G.831</u>	Management capabilities of transport networks based on the synchronous digital hierarchy (SDH)
<u>G.832</u>	Transport of SDH elements on PDH networks - Frame and multiplexing structures
<u>G.841</u>	Types and characteristics of SDH network protection architectures
<u>G.842</u>	Interworking of SDH network protection architectures
<u>G.851.1</u>	Management of the transport network - Application of the RM-ODP framework
<u>G.852.1</u>	Enterprise viewpoint for simple subnetwork connection management
<u>G.852.2</u>	Enterprise viewpoint description of transport network resource model
<u>G.852.3</u>	Enterprise viewpoint for topology management
<u>G.852.6</u>	Enterprise viewpoint for trail management


<u>G.852.8</u>	Enterprise viewpoint for pre-provisioned adaptation management
<u>G.852.10</u>	Enterprise viewpoint for pre-provisioned link connection management
<u>G.852.12</u>	Enterprise viewpoint for pre-provisioned link management
<u>G.852.16</u>	Enterprise viewpoint for pre-provisioned route discovery
<u>G.853.1</u>	Common elements of the information viewpoint for the management of a transport network
<u>G.853.2</u>	Subnetwork connection management information viewpoint
<u>G.853.3</u>	Information viewpoint for topology management
<u>G.853.6</u>	Information viewpoint for trail management
<u>G.853.8</u>	Information viewpoint for pre-provisioned adaptation management
<u>G.853.10</u>	Information viewpoint for pre-provisioned link connection management
<u>G.853.12</u>	Information viewpoint for pre-provisioned link management
<u>G.853.16</u>	Information viewpoint for pre-provisioned route discovery
<u>G.854.1</u>	Computational interfaces for basic transport network model
<u>G.854.3</u>	Computational viewpoint for topology management
<u>G.854.6</u>	Computational viewpoint for trail management
<u>G.854.8</u>	Computational viewpoint for pre-provisioned adaptation management
<u>G.854.10</u>	Computational viewpoint for pre-provisioned link connection management
<u>G.854.12</u>	Computational viewpoint for pre-provisioned link management
<u>G.854.16</u>	Computational viewpoint for pre-provisioned route discovery
<u>G.855.1</u>	GDMO engineering viewpoint for the generic network level model
<u>G.861</u>	Principles and guidelines for the integration of satellite and radio systems in SDH transport networks
<u>G.871</u>	Framework for optical transport network Recommendations
<u>G.872</u>	Architecture of optical transport networks
<u>G.873.1</u>	Optical Transport Network (OTN): Linear protection
<u>G.874</u>	Management aspects of the optical transport network element
<u>G.874.1</u>	Optical transport network (OTN): Protocol-neutral management information model for the network element view
<u>G.901</u>	General considerations on digital sections and digital line systems
<u>G.902</u>	Framework Recommendation on functional access networks (AN) - Architecture and functions, access types, management and service node aspects
<u>G.911</u>	Parameters and calculation methodologies for reliability and availability of fibre optic systems
<u>G.921</u>	Digital sections based on the 2048 kbit/s hierarchy
<u>G.931</u>	<i>[Withdrawn] Digital line sections at 3152 kbit/s</i>
<u>G.941</u>	Digital line systems provided by FDM transmission bearers
<u>G.950</u>	General considerations on digital line systems
<u>G.951</u>	Digital line systems based on the 1544 kbit/s hierarchy on symmetric pair cables
<u>G.952</u>	Digital line systems based on the 2048 kbit/s hierarchy on symmetric pair cables
<u>G.953</u>	Digital line systems based on the 1544 kbit/s hierarchy on coaxial pair cables
<u>G.954</u>	Digital line systems based on the 2048 kbit/s hierarchy on coaxial pair cables
<u>G.955</u>	Digital line systems based on the 1544 kbit/s and the 2048 kbit/s hierarchy on optical fibre cables
<u>G.956</u>	<i>[Withdrawn] Digital line systems based on the 2048 kbit/s hierarchy on optical fibre cables</i>
<u>G.957</u>	Optical interfaces for equipments and systems relating to the synchronous digital hierarchy
<u>G.958</u>	<i>[Withdrawn] Digital line systems based on the synchronous digital hierarchy for use on</i>

*optical fibre cables*

- G.959.1 Optical transport network physical layer interfaces
- G.960 Access digital section for ISDN basic rate access
- G.961 Digital transmission system on metallic local lines for ISDN basic rate access
- G.962 Access digital section for ISDN primary rate at 2048 kbit/s
- G.963 Access digital section for ISDN primary rate at 1544 kbit/s
- G.964 V-interfaces at the digital local exchange (LE) - V5.1 interface (based on 2048 kbit/s) for the support of access network (AN)
- G.965 V-interfaces at the digital local exchange (LE) - V5.2 interface (based on 2048 kbit/s) for the support of access network (AN)
- G.966 Access digital section for B-ISDN
- G.967.1 VB5.1 reference point specification
- G.967.2 VB5.2 reference point specification
- G.967.3 Protocol implementation conformance statements for interfaces at VB5 reference points
- G.971 General features of optical fibre submarine cable systems
- G.972 Definition of terms relevant to optical fibre submarine cable systems
- G.973 Characteristics of repeaterless optical fibre submarine cable systems
- G.974 Characteristics of regenerative optical fibre submarine cable systems
- G.975 Forward error correction for submarine systems
- G.975.1 Forward error correction for high bit rate DWDM submarine systems
- G.976 Test methods applicable to optical fibre submarine cable systems
- G.977 Characteristics of optically amplified optical fibre submarine cable systems
- G.981 PDH optical line systems for the local network
- G.982 Optical access networks to support services up to the ISDN primary rate or equivalent bit rates
- G.983.1 Broadband optical access systems based on Passive Optical Networks (PON)
- G.983.2 ONT management and control interface specification for B-PON
- G.983.3 A broadband optical access system with increased service capability by wavelength allocation
- G.983.4 A broadband optical access system with increased service capability using dynamic bandwidth assignment (DBA)
- G.983.5 A broadband optical access system with enhanced survivability
- G.983.6 ONT management and control interface specifications for B-PON system with protection features
- G.983.7 ONT management and control interface specification for dynamic bandwidth assignment (DBA) B-PON system
- G.983.8 B-PON OMCI support for IP, ISDN, video, VLAN tagging, VC cross-connections and other select functions
- G.Imp983.1 Implementers' guide for Recommendation G.983.1
- G.Imp983.2 Implementors' Guide to G.983.2 (2002)
- G.984.1 Gigabit-capable Passive Optical Networks (GPON): General characteristics
- G.984.2 Gigabit-capable Passive Optical Networks (GPON): Physical Media Dependent (PMD) layer specification
- G.984.3 Gigabit-capable Passive Optical Networks (GPON): Transmission Convergence Layer specification
- G.985 100 Mbit/s point-to-point Ethernet based optical access system
- G.989.1 Phoneline networking transceivers - Foundation

<u>G.989.2</u>	Phoneline networking transceivers - Payload format and link layer requirements
<u>G.989.3</u>	Phoneline networking transceivers - Isolation function
<u>G.991.1</u>	High bit rate Digital Subscriber Line (HDSL) transceivers
<u>G.991.2</u>	Single-pair high-speed digital subscriber line (SHDSL) transceivers
<u>G.992.1</u>	Asymmetrical digital subscriber line (ADSL) transceivers
<u>G.992.2</u>	Splitterless asymmetric digital subscriber line (ADSL) transceivers
<u>G.992.3</u>	Asymmetric digital subscriber line transceivers 2 (ADSL2)
<u>G.992.4</u>	Splitterless asymmetric digital subscriber line transceivers 2 (splitterless ADSL2)
<u>G.992.5</u>	Asymmetrical Digital Subscriber Line (ADSL) transceivers - Extended bandwidth ADSL2 (ADSL2+)
<u>G.993.1</u>	Very high speed digital subscriber line foundation
<u>G.994.1</u>	Handshake procedures for digital subscriber line (DSL) transceivers
<u>G.995.1</u>	Overview of digital subscriber line (DSL) Recommendations
<u>G.996.1</u>	Test procedures for digital subscriber line (DSL) transceivers
<u>G.997.1</u>	Physical layer management for digital subscriber line (DSL) transceivers
<u>G.1000</u>	Communications Quality of Service: A framework and definitions
<u>G.1010</u>	End-user multimedia QoS categories
<u>G.1020</u>	Performance parameter definitions for quality of speech and other voiceband applications utilising IP networks
<u>G.7041</u>	Generic framing procedure (GFP)
<u>G.7042</u>	Link capacity adjustment scheme (LCAS) for virtual concatenated signals
<u>G.7710</u>	Common equipment management function requirements
<u>G.7712</u>	Architecture and specification of data communication network
<u>G.7713</u>	Distributed call and connection management (DCM)
<u>G.7713.1</u>	Distributed call and connection management (DCM) based on PNNI
<u>G.7713.2</u>	Distributed Call and Connection Management: Signalling mechanism using GMPLS RSVP-TE
<u>G.7713.3</u>	Distributed Call and Connection Management: Signalling mechanism using GMPLS CR-LDP
<u>G.7714</u>	Generalized automatic discovery techniques
<u>G.7714.1</u>	Protocol for automatic discovery in SDH and OTN networks
<u>G.7715</u>	Architecture and Requirements for Routing in the Automatic Switched Optical Networks
<u>G.7715.1</u>	ASON routing architecture and requirements for link state protocols
<u>G.8010</u>	Architecture of Ethernet Layer Networks
<u>G.8040</u>	GFP frame mapping into plesiochronous digital hierarchy (PDH)
<u>G.8080</u>	Architecture for the automatic switched optical networks (ASON)
<u>G.8201</u>	Error performance parameters and objectives for multi-operator international paths within the Optical Transport Network (OTN)
<u>G.8251</u>	The control of jitter and wander within the optical transport network (OTN)
<u>G.100SerSup29</u>	Planning of mixed analogue-digital circuits (chains, connections)
<u>G.100SerSup31</u>	Principles of determining an impedance strategy for the local network
<u>G.100SerSup32</u>	Transmission aspects of digital mobile radio systems
<u>G.Sup1</u>	<i>[Withdrawn] Calculation of the stability of international connections established in accordance with the transmission and switching plan</i>
<u>G.Sup2</u>	<i>[Withdrawn] Talker echo on international connections.</i>
<u>G.Sup3</u>	<i>[Withdrawn] Evaluation of echo control devices</i>
<u>G.Sup4</u>	Certain methods of avoiding the transmission of excessive noise between interconnected systems

<u>G.Sup5</u>	Measurement of the load of telephone circuits under field conditions
<u>G.Sup6</u>	<i>[Withdrawn] Example showing how the total value of line noise specified for the hypothetical reference circuit on open-wire lines might be broken down into its various components</i>
<u>G.Sup7</u>	Loss-frequency response of channel-translating equipment used in some countries for international circuits
<u>G.Sup8</u>	Method proposed by the Belgian telephone administration for interconnection between coaxial and symmetric pair systems
<u>G.Sup9</u>	<i>[Withdrawn] Roll effect in coaxial pair systems</i>
<u>G.Sup10</u>	<i>[Withdrawn] Application of Recommendation B.4 concerning the use of decibel</i>
<u>G.Sup11</u>	<i>[Withdrawn] Data on cable ships and submersible equipments of various countries</i>
<u>G.Sup13</u>	Noise at the terminals of the battery supply
<u>G.Sup15</u>	<i>[Withdrawn] Almost-differential quasi-ternary code (ADQ code)</i>
<u>G.Sup17</u>	Group-delay distortion performance of terminal equipment
<u>G.Sup18</u>	<i>[Withdrawn] Information on submarine cables used in deep water</i>
<u>G.Sup19</u>	Digital crosstalk measurement (method used by the Administrations of France, the Netherlands and Spain)
<u>G.Sup20</u>	<i>[Withdrawn] Possible combinations of basic transmission impairments in hypothetical reference connections</i>
<u>G.Sup21</u>	<i>[Withdrawn] The use of quantizing distortion units in the planning of international connections</i>
<u>G.Sup22</u>	Mathematical models of multiplex signals
<u>G.Sup23</u>	<i>[Withdrawn] Explanatory notes for the information of designers of a maritime mobile satellite system</i>
<u>G.Sup24</u>	<i>[Withdrawn] Consideration concerning quantizing distortion units of some digital devices that process encoded signals</i>
<u>G.Sup26</u>	Estimating the signal load margin of FDM wideband amplifier equipment and transmission systems
<u>G.Sup27</u>	Interference from external sources
<u>G.Sup28</u>	Application of transmultiplexers, FDM codecs, data-in-voice (DIV) systems and data-over-voice (DOV) systems during the transition from an analogue to a digital network
<u>G.Sup31</u>	Principles of determining an impedance strategy for the local network
<u>G.Sup32</u>	Transmission aspects of digital mobile radio systems
<u>G.Sup33</u>	<i>[Withdrawn] Examples of fibre design guidelines (diagrams used in Japan and in the United Kingdom)</i>
<u>G.Sup34</u>	Temperature in underground containers for the installation of repeaters
<u>G.Sup35</u>	Guidelines concerning the measurement of wander
<u>G.Sup36</u>	Jitter and wander accumulation in digital networks
<u>G.Sup37</u>	ITU-T Recommendation G.763 digital circuit multiplication equipment (DCME) tutorial and dimensioning
<u>G.Sup38</u>	Variable bit rate calculations for ITU-T Recommendation G.767 Digital Circuit Multiplication Equipment (DCME)
<u>G.Sup39</u>	Optical system design and engineering considerations



**International Telecommunication Union**

**Our Sites News Events Publications Site Map About Us**

[Français](#) [Español](#)

[Print version](#)

[Home](#) : [ITU-T](#) : [Publications](#) : [Recommendations](#) : [Series G](#) :  
[G.992.5](#)

[Recently posted](#) - [Search Recommendations](#) -  
[Shopping cart](#)

## **Asymmetrical Digital Subscriber Line (ADSL) transceivers - Extended bandwidth ADSL2 (ADSL2+)**

**Recommendation G.992.5**

Approved in 2003-05

In force components

Number	Title	Status
<a href="#">G.992.5 (05/03)</a>	Asymmetrical Digital Subscriber Line (ADSL) transceivers - Extended bandwidth ADSL2 (ADSL2+)	In force


Top - [Feedback](#) - [Copyright \(c\) ITU All Rights Reserved](#)  
Contact for this page : [ITU-T Publications](#)  
Updated : 2004.02.04

**International Telecommunication Union**[Our Sites](#) [News](#) [Events](#) [Publications](#) [Site Map](#) [About Us](#)[Français](#) [Español](#)[Print version](#)[Home](#) : [ITU-T](#) : [Publications](#) : [Recommendations](#) : [Series G](#) :  
[G.992.4](#)[Recently posted](#)[Search Recommendations](#)[Shopping cart](#) **Splitterless asymmetric digital subscriber line transceivers 2 (splitterless ADSL2)****Recommendation G.992.4****Approved in 2002-07****In force components**

Number	Title	Status
<a href="#">G.992.4 (07/02)</a>	Splitterless asymmetric digital subscriber line transceivers 2 (splitterless ADSL2)	In force

Top - Feedback - Copyright (c) ITU All Rights Reserved  
Contact for this page : ITU-T Publications  
Updated : 2003/02/27



**International Telecommunication Union**[Our Sites](#) [News](#) [Events](#) [Publications](#) [Site Map](#) [About Us](#)[Français](#) [Español](#)[Print version](#)[Home](#) : [ITU-T](#) : [Publications](#) : [Recommendations](#) : Series G :  
[G.992.3](#) [Search](#)  
[Recently posted](#) - [Search Recommendations](#) -  
[Shopping cart](#)**Asymmetric digital subscriber line transceivers 2 (ADSL2)****Recommendation G.992.3**

Approved in 2002-07

In force components		
Number	Title	Status
<a href="#">G.992.3 (07/02)</a>	Asymmetric digital subscriber line transceivers 2 (ADSL2) This Recommendation includes the changes introduced by Amendment 1 (2003)	In force
<a href="#">G.992.3 (2002) Corrigendum 1 (12/03)</a>		In force
<a href="#">G.992.3 (2002) Amendment 1 Corrigendum 1 (02/04)</a>		Pre-published
<a href="#">G.992.3 (2002) Corrigendum 2 (02/04)</a>		In force
<a href="#">G.992.3 (2002) Amendment 1 (05/03)</a>	To be published	Pre-published
	This amendment is not published since its content has been directly incorporated in G.992.3 (07/2002)	

Top - Feedback - Copyright (c) ITU All Rights Reserved  
Contact for this page : ITU-T Publications  
Updated : 2004/03/26


**International Telecommunication Union**
[Our Sites](#) [News](#) [Events](#) [Publications](#) [Site Map](#) [About Us](#)
[Français](#) [Español](#)
[Print version](#)
[Home](#) : [ITU-T](#) : [Publications](#) : [Recommendations](#) : Series G :  
[G.992.1](#)
[Recently posted](#) - [Search Recommendations](#) - [Shopping cart](#)


## Asymmetrical digital subscriber line (ADSL) transceivers

**Recommendation G.992.1**

Approved in 1999-07

### In force components

Number	Title	Status
<a href="#">G.992.1 (07/99)</a>	Asymmetrical digital subscriber line (ADSL) transceivers	In force
<a href="#">G.992.1 (1999) Amendment 1 Corrigendum 1 (12/03)</a>	Corrigendum 1 to G.992.1 Amendment 1	Pre-published
<a href="#">G.992.1 (1999) Corrigendum 1 (11/01)</a>	Asymmetric digital subscriber line (ADSL) transceivers Corrigendum 1	In force
<a href="#">G.992.1 (1999) Corrigendum 2 (07/02)</a>	Corrigendum 2 The changes introduced by this corrigendum are included in G.992.1 (1999) Amendment 1	In force
<a href="#">G.992.1 (1999) Amendment 1 (03/03)</a>	Revised Annex C, new Annex I and new Appendix V This amendment includes the changes introduced by G.992.1 (1999) Corrigendum 2	In force
<a href="#">G.992.1 Annex H (10/00)</a>	Specific requirements for a synchronized symmetrical DSL (SSDSL) system operating in the same cable binder as ISDN as defined in G.961 Appendix III	In force

Top - Feedback - Copyright (c) ITU All Rights Reserved  
 Contact for this page : ITU-T Publications  
 Updated : 2004/04/05